

User Guide

Development Board Hardware User Guide

Introduction

The purpose of this document is to allow users to quickly become familiar with the N32G003F5Q7-STB development board, understand the functions, usage instructions, and precautions of the development board, in order to facilitate MCU debugging, and development based on the development board.

1	HARDWARE DEVELOPMENT INSTRUCTIONS.....	1
1.1	<i>Brief.....</i>	1
1.2	<i>Development Board Function.....</i>	2
1.3	<i>Development board layout.....</i>	2
1.4	<i>Development Board Jumper Instructions</i>	4
1.5	<i>Development Board Schematic.....</i>	5
2	VERSION HISTORY	10
3	DISCLAIMER	11

1 Hardware Development Instructions

1.1 Brief


The N32G003F5Q7-STB development board is used for sample development of 32-bit N32G003F5Q7 chips of Nsing Technology Co., Ltd. This document describes the functions, usage instructions and precautions of the N32G003F5Q7-STB development board in detail.

1.2 Development Board Function

The part number of the main MCU chip in the development board is N32G003F5Q7, and it is packaged with QFN20 pins. The development board connects all functional interfaces to facilitate customer development.

1.3 Development board layout

Figure 1-1 Development Board Layout

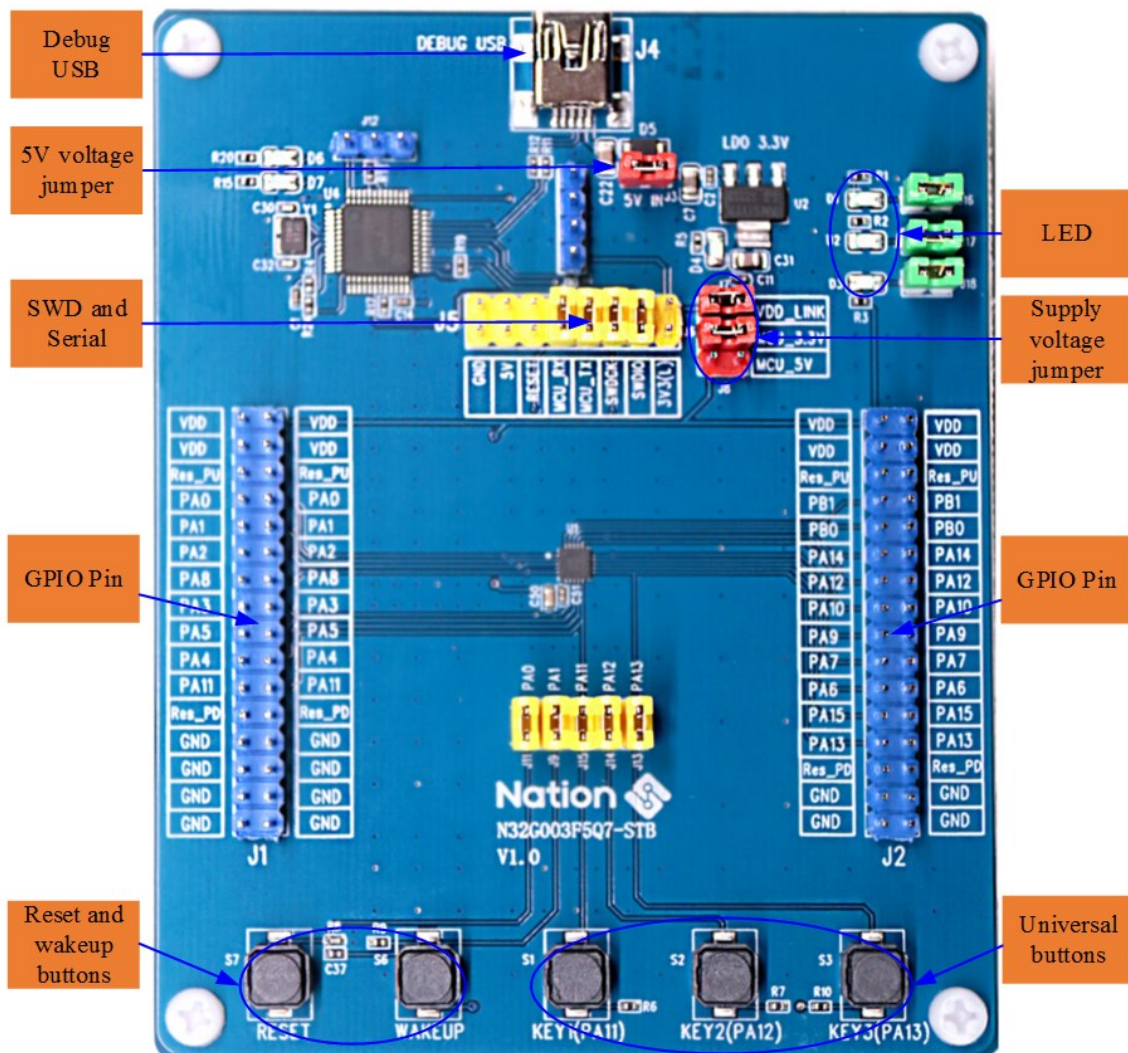

1) Power supply for the development board

The development board can be powered by DEBUG USB (J4), and connected to 3.3V LDO input port through J3 jumper.

2) Debug USB (J4)

Through the DEBUG USB interface of the NS-LINK chip (U4), it can provide the function of downloading and debugging the main MCU program, and can also connect the serial port of the MCU to provide the function of USB to serial conversion function.

3) SWD interface and Serial port (J5)

SWD interface: SWDIO and SWDCK are used to download and debug the main MCU program. user can use ULINK2 or JLINK to download and debug the MCU, or user can short the SWDIO signal pin and the SWDCK signal pin with the jumper cap, and perform MCU downloading and debugging through DEBUG USB.

Serial port: MCU_TX and MCU_RX are used as serial port external signals. MCU's PA2 (TX) and PA3 (RX) are used as serial port, which can be connected to external serial port devices separately. Or by shorting the MCU_TX signal pin and the MCU_RX signal pin with jumper cap, customers can use the NS-LINK on the development board to convert the USB port a serial port for convenience.

4) Reset and Wake Buttons (S7, S6)

S7 and S6 are the reset button and wake-up button respectively, connected the chip's PA0 pin and PA1 pin, used for chip reset and wake-up functions.

5) Universal keys (S1, S2, S3)

S1, S2, and S3 are general buttons, which are connected to the pins PA11, PA12 and PA13 of the chip respectively.

6) GPIO (J1, J2)

The GPIO interfaces of the chip are all lead out, and the 3.3V voltage, GND pin, 3.3V pull-up and GND pull-down are also reserved on the pins, which is convenient for testing. For

the specific definitions of the GPIOs, please refer to "UM_N32G003 Series User Manual".

1.4 Development Board Jumper Instructions

Figure 1-2 Development Board Jumper Description

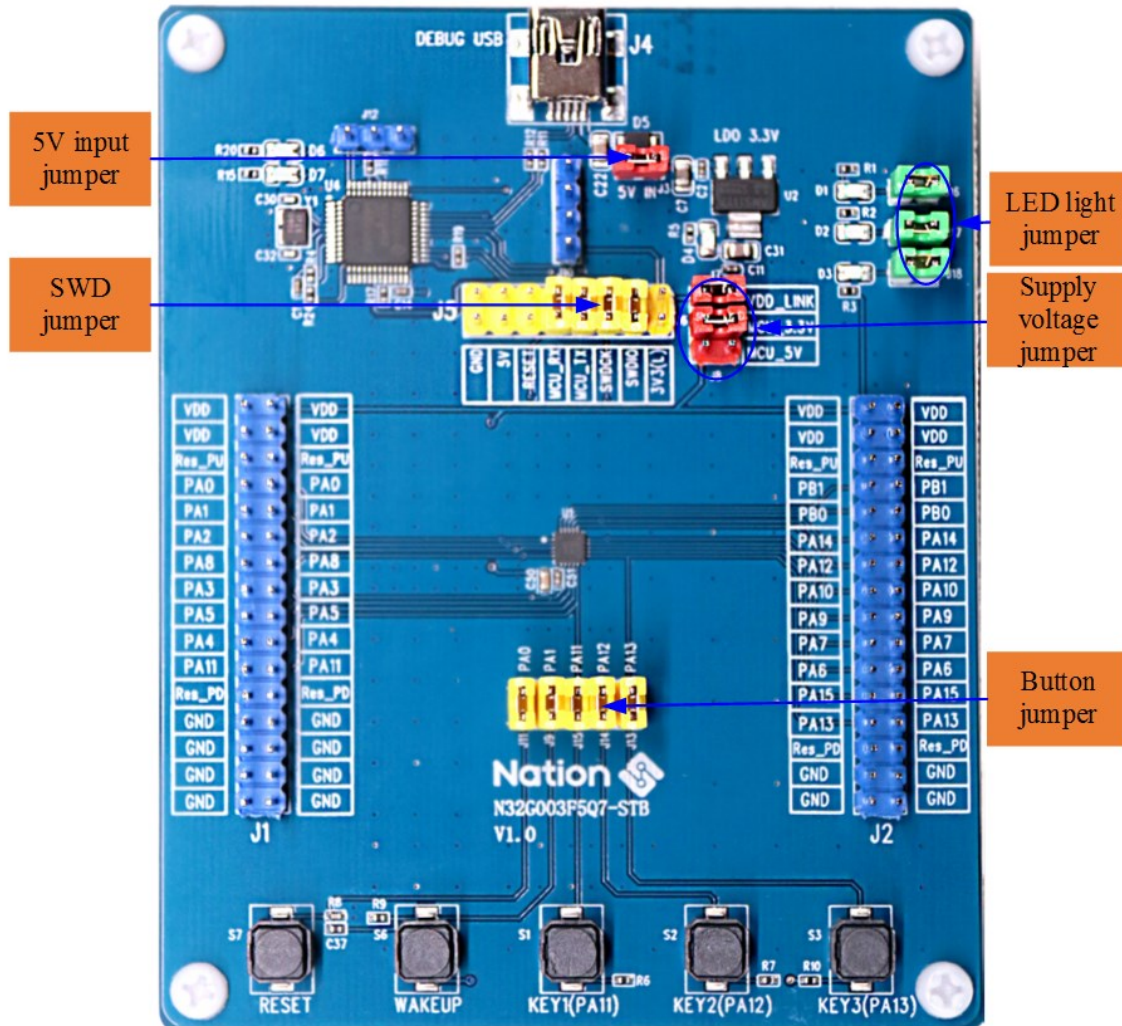


Table 1-1 Development Board Jumper Description List

No.	Jumper bit number	Jumper function	Instructions for use
1	J3	5V input voltage jumper	The J3 jumper is used to connect the J4 USB interface to supply power to the LDO3.3V input port.
2	J6、J7、J8	Power supply jumper	J7: Power supply 3.3V to NS-LINK MCU chip. J6: Choose to supply 3.3V to the main MCU chip. J8: Choose to supply 5V to the main MCU chip.
3	J5	SWD jumper	Using NS-LINK to download the program to the MCU through the USB DEBUG port, you need to short the SWDIO signal pin and the SWDCK signal pin.
	J5	Serial jumper	When using NS-LINK as a serial port through the USB DEBUG port, you need to short the MCU_TX signal pin and the MCU_RX signal pin.
4	J16、J17、J18	LED light jumper	The LED light jumper can disconnect the GPIO from the LED J16: D1(PA6) J17: D2(PA7) J18: D3(PA10)
5	J9、J11、J13、J14、J15	Button jumper	Button jumper can disconnect GPIO from the button J9: WAKEUP (PA1) J11: RESET (PA0) J15: KEY1 (PA11) J14: KEY2 (PA12) J13: KEY2 (PA13)

1.5 Development Board Schematic


The schematic diagram of the N32G003F5Q7-STB development board is described as

follows (For details, please refer to "N32G003F5Q7-STB_V1.0").

1) MCU connection

Refer to Figure 1-3 for the schematic diagram of the MCU connection. The MCU VDD pin is connected two capacitors, and all GPIOs are connected to the J1 and J2 pins for easy debugging.

Figure 1-3 MCU connection diagram

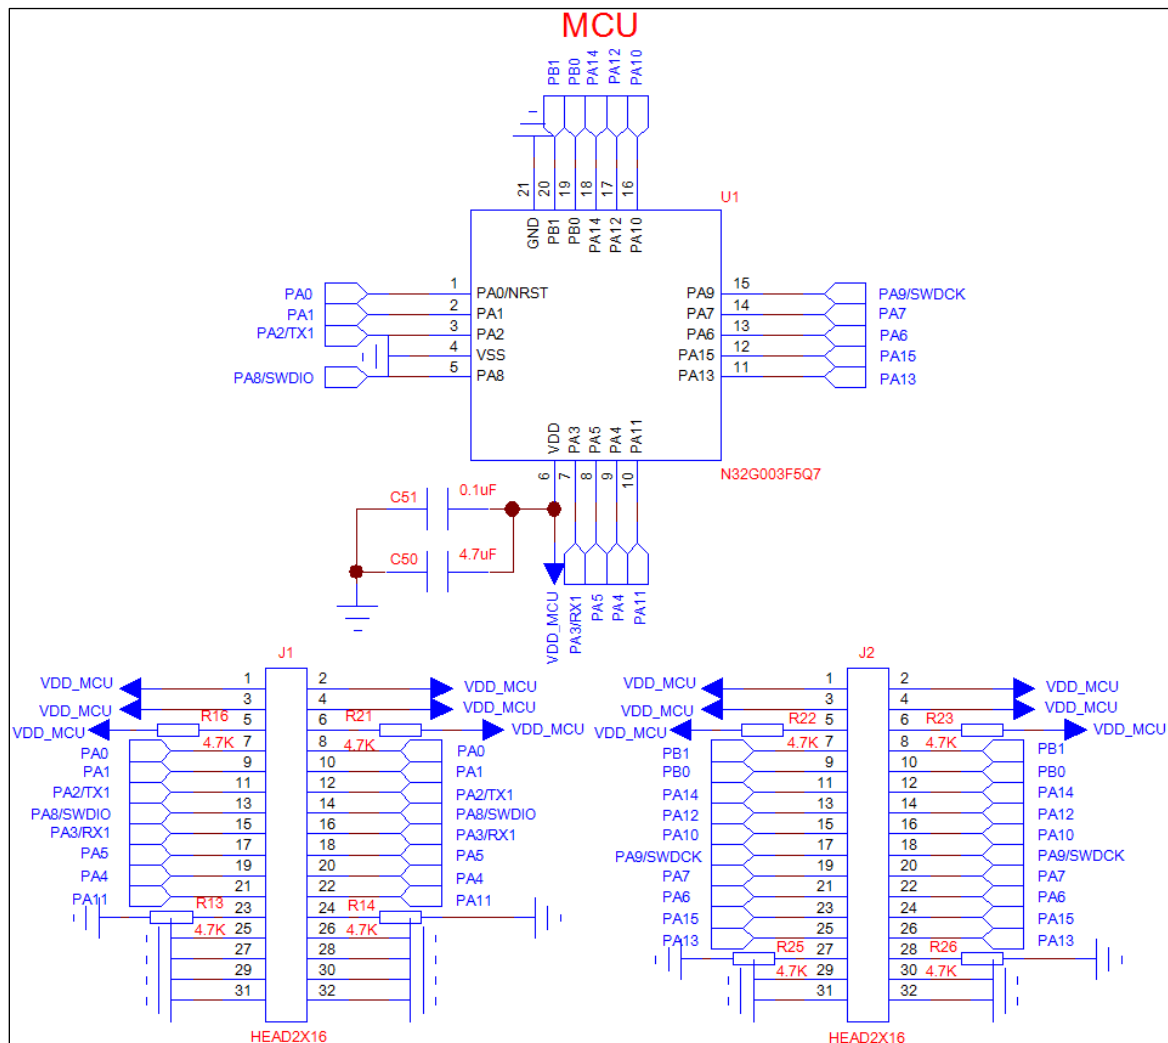


2) Power Design

Refer to Figure 1-4 for the schematic diagram of the power supply design. The PCB is powered by 5V through USB, and then outputs 3.3V through the LDO to supply power to

the entire PCB board.


Figure 1-4 Power Design

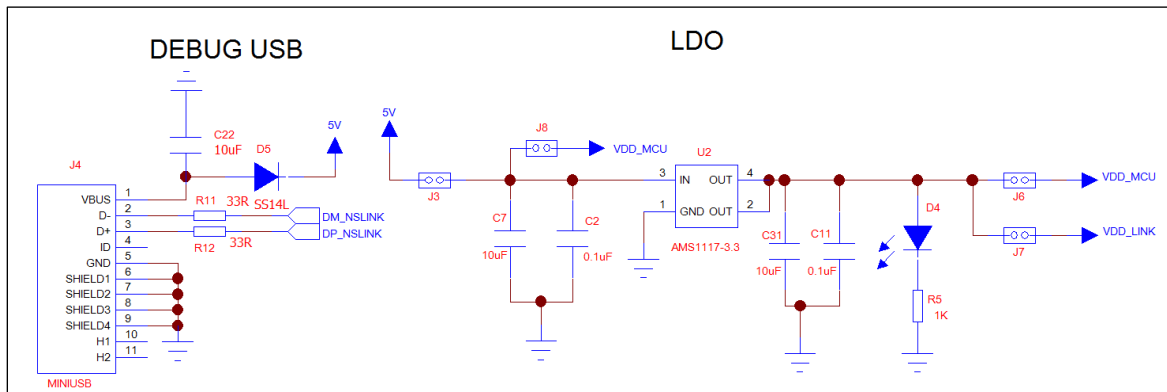

3) Button design

Refer to Figure 1-5 for the schematic diagram of the key design. There are a total of 5 keys, which are the three general keys, the MCU wake-up key and reset key.

Figure 1-5 Button Design

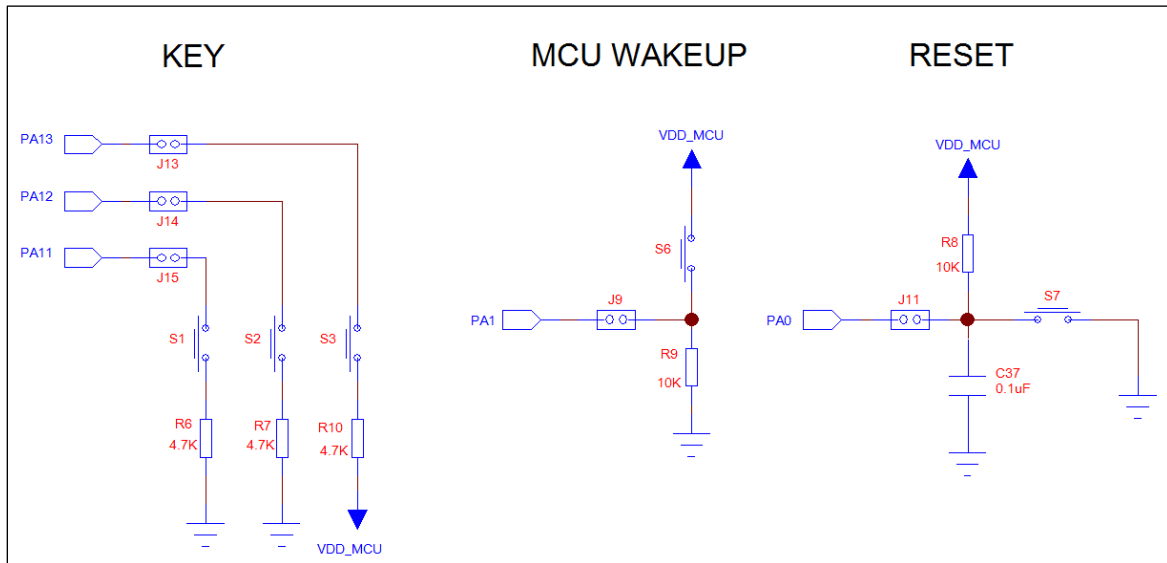


4) LED light design

Refer to Figure 1-6 for the schematic diagram of LED light design. There are a total of 5 LED lights. D1, D2, and D3 are connected to PA6, PA7 and PA10 of the main MCU respectively, which can be used for debugging. D6 and D7 are used for NS-LINK MCU

control to monitor the running status of NS-LINK.


Figure 1-6 LED Light Design

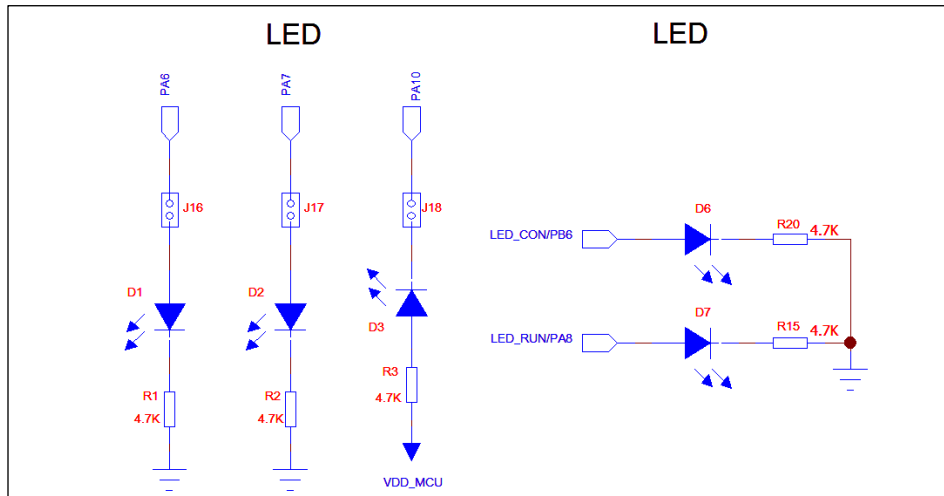

5) NS-LINK

Refer to Figure 1-7 for the schematic diagram of NS-LINK. Users can directly connect the USB cable to download the program through the DEBUG USB port, without the need for a ULINK or JLINK debugger. You can also debug through the DEBUG USB virtual serial port.

Figure 1-7 NS-LINK

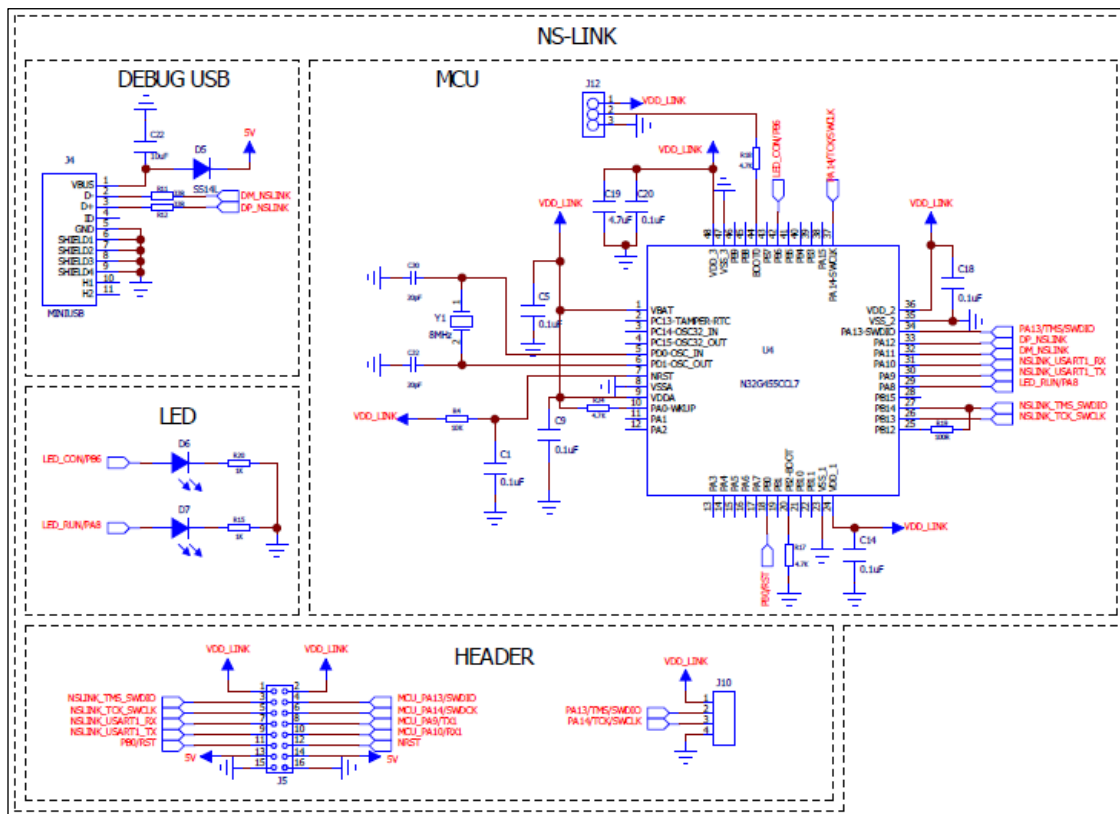

- **Description of peripheral devices:**

- 1) When designing PCB LAYOUT, put two capacitors near VDD, Which are 4.7uF and 0.1uF respectively.

2 Version History

Version	Date	Changes
V1.0	2022.11.25	Initial version

3 Disclaimer

This document is the exclusive property of NSING TECHNOLOGIES PTE. LTD.(Hereinafter referred to as NSING). This document, and the product of NSING described herein (Hereinafter referred to as the Product) are owned by NSING under the laws and treaties of Republic of Singapore and other applicable jurisdictions worldwide. The intellectual properties of the product belong to Nations Technologies Inc. and Nations Technologies Inc. does not grant any third party any license under its patents, copyrights, trademarks, or other intellectual property rights. Names and brands of third party may be mentioned or referred thereto (if any) for identification purposes only. NSING reserves the right to make changes, corrections, enhancements, modifications, and improvements to this document at any time without notice. Please contact NSING and obtain the latest version of this document before placing orders. Although NATIONS has attempted to provide accurate and reliable information, NATIONS assumes no responsibility for the accuracy and reliability of this document. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. In no event shall NATIONS be liable for any direct, indirect, incidental, special, exemplary, or consequential damages arising in any way out of the use of this document or the Product. NATIONS Products are neither intended nor warranted for usage in systems or equipment, any malfunction or failure of which may cause loss of human life, bodily injury or severe property damage. Such applications are deemed, Insecure Usage'. Insecure usage includes, but is not limited to: equipment for surgical implementation, atomic energy control instruments, airplane or spaceship instruments, all types of safety devices, and other applications intended to supporter sustain life. All Insecure Usage shall be made at user's risk. User shall indemnify NATIONS and hold NATIONS harmless from and against all claims, costs, damages, and other liabilities, arising from or related to any customer's Insecure Usage Any express or implied warranty with regard to this document or the Product, including, but not limited to. The warranties of merchantability, fitness for a particular purpose and non-infringement are disclaimed to the fullest extent permitted by law. Unless otherwise explicitly permitted by NATIONS, anyone may not use, duplicate, modify, transcribe or otherwise distribute this document for any purposes, in whole or in part.